

FlowSwitch FS 700

**Dust monitoring and filter break detection
adaptable for any application**



Application

The FlowSwitch FS 700 monitors the dust concentration behind a bag or cartridge filter. It is installed on the clean air side of the filter. It identifies if a filter is damaged, e.g. by cracks, fractures or assembly errors. This allows to replace a damaged or broken filter in time, without losing production time and without polluting the shopfloor or environment.

Dust monitors are especially important in case of heavily contaminated air, recirculation into the factory, strict external emission limits or dust reuse.

The FS 700 is the most flexible device of its class and can be adjusted perfectly to your process. It is available with a relay or analog output, in high temperature versions, as food version and can be adapted for continuous or non-continuous operation.

Scope of use

Aluminum
Bakeries
Building materials
Cement industry
Chemical industry
Fertilizer industry
Food industry
Glass production

Mills
Pharmaceuticals
Power plants
Pulp and Paper
Steel industry
Surface cleaning
Wood industry
etc.


Main Benefits

- Prevents uncontrolled dust emissions and unnecessary cleaning due to damaged dust filters
- Ensures recircled air is always clean
- Ensures that strict emission limits are fulfilled
- Saves the company from investing into additional police/emergency filters
- Very reactive and fast detection of filter damage
- Is not affected by dust buildup on the rod
- Wear- and maintenance free
- Easy to install into existing air ducts
- Adjustable sensitivity and damping
- Very flexible, can be used for nearly all applications, with multiple options

Function

The measurement system of the FS 700 is based on the triboelectric effect. Particles collide permanently with each other and are charged in a natural way. If these electrically charged particles are flying next to the sensor rod of the FS 700 or touch it, the particles are detected via a charge transfer. Resting particles, such as deposits etc., do not affect the measurement. An installation into an existing exhaust duct is possible without any problems.

The sensor is available either with a relay or with analog output (4-20 mA). The sensor rod can be individually selected between 45 and 800 mm length. A wide temperature range can be addressed with optional versions for 130°C, 200°C or 290°C process temperature, and ATEX zone 2 and 22 are possible. The sensor material is prepared for use in the food industry. Alternative sensor isolations made out of PA or PTFE and seals out of NBR, FPM or silicone are available. In addition, several settings at the sensor can be adjusted, e.g. for sensitivity and damping.

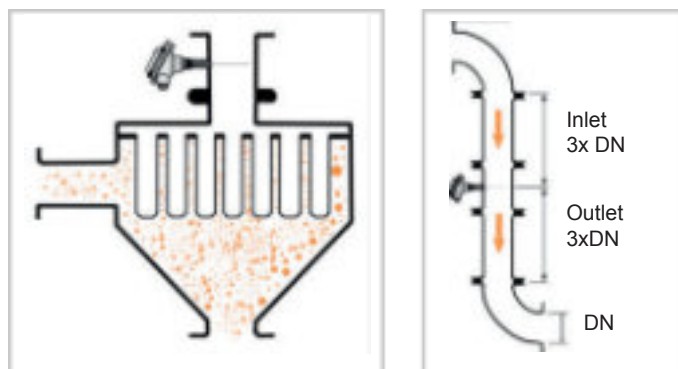


A FS 700 on the clean air side of a filter and in a pipe

To install a FS 700 a threaded socket is welded onto the pipe and a small hole for the sensor rod drilled. The sensor is fixed on the socket. The rod length should be at least 1/3 of the pipe diameter and the rod must not touch the opposite side. The sensor can also be connected with a Tri-clamp adapter. Calibration is done manually and allows to adapt the sensor to any process.

Technical Data

Housing material	Stainless Steel (1.4571)
Sensor rod	Stainless Steel (1.4571)
Rod length	45-800 mm, customized
Mech.connection	G 0,5" (standard) G 1,5" (high temp. versions)
Tri-clamp Adapter	as option
Ambient temperature	-20°C to +50 / +70°C
Process temperature	-20°C to +90°C 130°C, 200°C, 290°C as option
Process pressure	0 – 6 bar
Protection class	IP65
Ex protection / ATEX	Optional Zone 2 or 22
Power supply	17 – 31 VDC
Current consumption	Max. 60 mA (relay vers.) Max 90 mA (analog vers.)
Output	relay or 4-20 mA
Switching voltage	48 VAC or 48 VDC (relay vers.)
Switching current	Max.1 A (relay vers.)
Output load	<500 Ohm (analog vers.)
Adjust. parameter	Sensitivity, damping
Calibration	Manually
Indicators	LEDs inside of

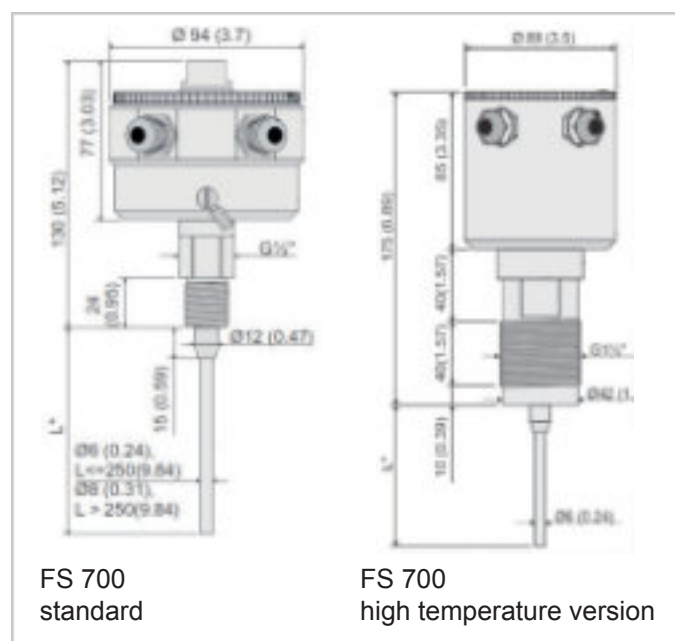

FS 700
standard

FS 700
high temperature version